

JIS COAXIAL CABLE

80°C 300V JIS-C-3501 Coaxial Cable

Product Description:

Conductor:

- Refer to individual product descriptions

Insulation:

- Refer to individual product descriptions

Jacket:

- PVC, black or white
- Temperature Rating: 80°C
- Voltage Rating: 300 Volts

Applications:


- Test equipment
- TV, Radio, Broadcast equipment, Data transmission

Packaging:


- 100M per coil
- Other put-ups available

Type Designation:

3C-2VCS

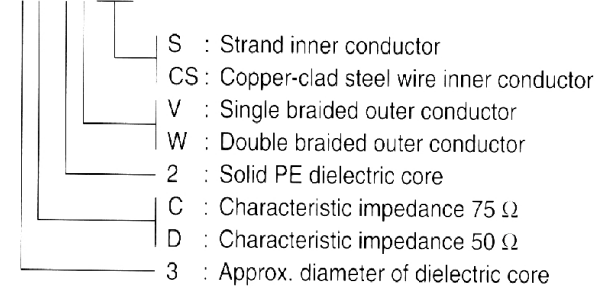

Construction:

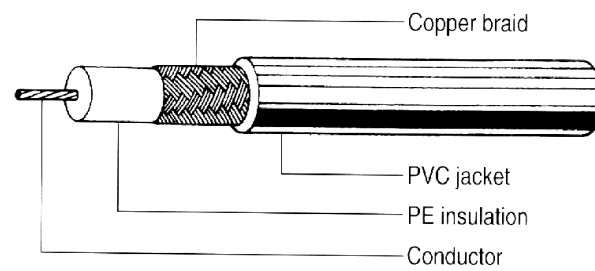

Type	Conductor		Dia Over Ins. mm	Braid shield		Nom. O.D. mm	Jacket Material	Nom. Imp-Ed. ohm	Nominal Capacitance pF/m	Nominal Attenuation Db/m
	No./mm	Material		Inner Composition	Outer Composition					
1.5C-2V	1/0.26	CCS	1.6	16/ 5/0.10		2.9	PVC	75	69±4	96
1.7C-2V	1/0.26	BC	1.7	16/ 5/0.12		3.2	PVC	75	69±4	96
2.5C-2V	1/0.4	BC	2.4	16/ 6/0.12		4.0	PVC	75	69±4	52
3C-2V	1/0.5	BC	3.1	16/ 6/0.14		5.4	PVC	75	67±3	42
3C-2VCS	1/0.5	CCS	3.1	16/ 6/0.14		5.4	PVC	75	67±3	42
3C-2VS	7/0.18	BC	3.1	16/ 6/0.14		5.4	PVC	75	67±3	43
3C-2W	1/0.5	BC	3.1	16/ 6/0.14	16/ 6/0.14	6.5	PVC	75	67±3	42
5C-2V	1/0.8	BC	4.9	16/ 8/0.14		7.4	PVC	75	67±3	27
5C-2W	1/1.8	BC	4.9	16/ 8/0.14	16/ 8/0.14	8.3	PVC	75	67±3	27
7C-2V	7/0.4	BC	7.3	24/ 8/0.18		10.4	PVC	75	67±3	22
10C-2V	7/0.5	BC	9.4	24/10/0.20		13.0	PVC	75	67±3	18
10C-2W	7/0.5	BC	9.2	24/10/0.20	24/10/0.20	14.2	PVC	75	67±3	18
0.8D-2V	1/0.26	CCS	0.8	16/ 3/0.10		2.0	PVC	75	102±8	180
1.5D-2V	7/0.18	BC	1.6	16/ 5/0.10		2.9	PVC	50	104±5	85
2.5D-2V	1/0.8	BC	2.7	16/ 7/0.12		4.3	PVC	50	100±5	45
3D-2V	7/0.32	BC	3.0	16/ 6/0.14		5.3	PVC	50	100±4	47
3D-2W	7/0.32	BC	3.0	16/ 6/0.14	16/ 6/0.14	6.4	PVC	50	100±4	46
5D-2V	1/1.4	BC	4.8	16/ 8/0.14		7.3	PVC	50	100±4	27
5D-2W	1/1.4	BC	4.8	16/ 8/0.14	16/ 6/0.14	8.0	PVC	50	100±4	27
8D-2V	7/0.8	BC	7.8	24/ 8/0.18		11.5	PVC	50	100±4	20
8D-2W	7/0.8	BC	7.8	24/ 8/0.18	24/ 8/0.18	12.5	PVC	50	100±4	20
10D-2V	1/2.9	BC	9.7	24/10/0.20		13.1	PVC	50	102±4	14