
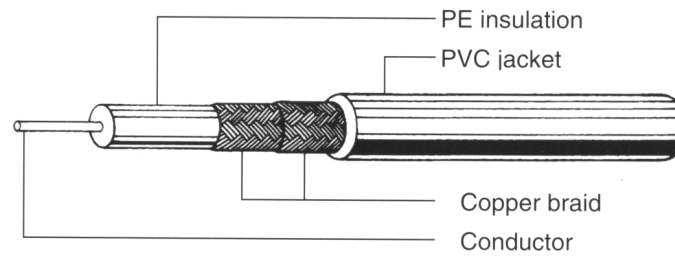
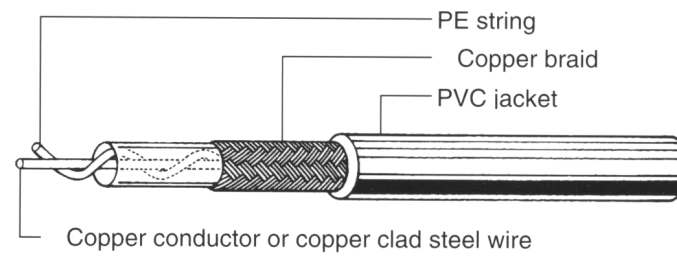


UL 1354, 1792 RG COAXIAL CABLE

60°C, 80°C 30V RG Coaxial Cable

Product Description:

RG-8/U:

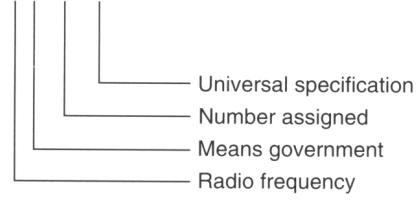

Type	Conductor		Dia Over Ins. mm	Braid shield		Nom. O.D. mm	Jacket Material	Nom. Imp-Ed. ohm	Nominal Capacitance pF/m	Nominal Attenuation db/m
	No./mm	Material		Inner Composition	Outer Composition					
RG-5/U	1/1.29	BC	4.7	16/ 9/0.16	16/ 9/0.16	8.4	PVC	52.5	93.5	85
RG-7/U	1/0.914	BC	6.35	24/ 7/0.18	-	9.4	PVC	94.5	41.0	66
RG-8/U	7/0.724	BC	7.24	24/ 8/0.18	-	10.3	PVC	52	96.8	68
RG-8A/U	7/0.724	BC	7.24	24/ 8/0.18	-	10.3	NC-PVC	52	96.8	68
RG-11/U	7/0.404	TC	7.24	24/ 8/0.18	-	10.3	PVC	75	67.3	72
RG-11A/U	7/0.404	TC	7.24	24/ 8/0.18	-	10.3	NC-PVC	75	67.3	72
RG-13/U	7/0.404	TC	7.11	24/ 9/0.16	24/ 8/0.16	10.7	PVC	74	67.3	72
RG-13A/U	7/0.404	TC	7.11	24/ 9/0.16	24/ 8/0.16	10.7	NC-PVC	74	67.3	72
RG-14/U	1/2.59	BC	9.40	24/10/0.18	24/ 8/0.16	13.8	PVC	52	96.8	49
RG-14A/U	1/2.59	BC	9.40	24/10/0.18	24/ 8/0.16	13.8	NC-PVC	52	96.8	49
RG-15/U	11.45/	CCS	9.40	24/10/0.18	24/ 8/0.16	13.8	PVC	76	65.6	51
RG-17/U	1/4.78	BC	17.3	24/14/0.26	-	22.1	PVC	52	96.8	32
RG-17A/U	1/4.78	BC	17.3	24/14/0.26	-	22.1	NC-PVC	52	96.8	32
RG-19/U	1/6.35	BC	23.1	36/12/0.26	-	28.5	PVC	52	96.8	22
RG-19A/U	1/6.35	BC	23.1	36/12/0.26	-	28.5	NC-PVC	52	96.8	22
RG-22/U	7/0.386X2C	BC	7.24	24/ 8/0.18	-	10.3	PVC	95	52.5	118
RG-22A/U	7/0.386X2C	BC	7.24	24/ 8/0.16	24/ 8/0.16	10.7	PVC	95	52.5	118
RG-29/U	1/0.813	BC	2.95	16/ 7/ 0.127	-	4.7	PE	53.5	93.5	130
RG-34/U	7/0.724	BC	11.6	24/ 9/0.16	-	15.9	PVC	71	70.5	47
RG-34B/U	7/0.632	BC	11.7	24/10/0.18	-	16.0	NC-PVC	75	67.0	48
RG-54A/U	7/0.386	BC	4.52	16/ 9/0.16	-	6.1	PE	58	85.8	101
RG-55/U	1/0.813	BC	2.90	16/ 7/0.127	16/ 7/0.127	5.0	PE	53.5	93.6	130

PF-Picofarad

db-Decibel