

UL SPT, CSA SPT FLEXIBLE CORD

60°C, 105°C 300V Flexible Cord

Product Description:

Conductor:

- Fully annealed stranded bare copper per ASTM B-33.
- 18 thru 10 AWG

Insulation:

- Premium grade color coded PVC
- Temperature Rating: 60°C or 105°C
- Voltage Rating: 300 Volts

Applications:

- SPT-1 & SPT-2: For use in household clocks, fans, radios and similar appliances
- UL 20288: Use in lighting fixtures..

Industry Approvals:

- UL SPT File No.E117873.
- CSA SPT File NO. LL82009.
- Passes UL VW-1 Vertical Flame Test.
- OSHA acceptable


Color:

- Available with yellow, white, black, brown, gray and gold.

Packaging:

- 1000 ft (305m) per coil
- Other put-ups available.

Construction:

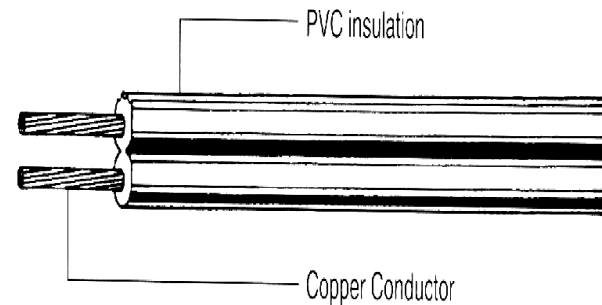

UL Style & CSA Type	AWG	Conductor Composition	No. Of Cores	Insulation Thickness	Nominal O.D.
		No./mm		mm	mm
SPT-1	18	41/0.160	2	0.76	2.7x 5.4
	18	41/0.160	3	0.76	2.7x 7.9
SPT-2	18	41/0.160	2	1.14	3.5x 7.0
	16	65/0.160	2	1.14	3.8x 7.6
	18	41/0.160	3	1.14	3.5x 8.6
	16	65/0.160	3	1.14	3.8x 9.6
SPT-3	18	41/0.160	2	1.5	4.4x 8.7
	16	65/0.160	2	2.152	4.8x 9.5
	14	41/0.254	2	2.03	6.0x 12.0
	12	65/0.254	2	2.41	7.4x 14.0
	10	104/0.254	2	2.79	9.1x 18.2
	18	41/0.160	3	1.52	4.4x 10.7
	16	65/0.160	3	1.52	4.8x 11.8
	14	41/0.254	3	2.03	6.0x 14.5
	12	65/0.254	3	2.41	7.4x 16.5
10	104/0.254	3	2.79	9.1x 18.8	
UL 20288	18	41/0.160	2	1.02	3.3x 5.8

ASTM American Society of Testing and Material.

VW-1 Pass a vertical flame test.

OSHA Occupational Safety and Health Administration.

Transparent PVC Used in UL 20288