

UL 2343, CSA AWM COMPUTER CABLE

80°C 300V Multi-Cores Braid Shield Computer Cable

Product Description:

Conductor:

- Fully annealed tinned copper per ASTM B-33.
- 24 thru 20 AWG

Insulation:

- Premium grade color coded semi-rigid PVC per UL 1061

Shield:

- 85% tinned copper braid

Jacket:

- PVC, chrome gray or black.
- Temperature Rating: 80°C
- Voltage Rating: 300 Volts

Applications:

- Computers
- Industrial equipment
- Data transmission
- Control circuits
- Suitable for EIA RS-232 applications


Industry Approvals:

- UL Style 2343 File No.E117873.
- CSA AWM File NO. LL82009.
- Passes UL VW-1 Vertical Flame Test.

Packaging:

- 1000 ft (305m)
- 500 ft (152m)
- Available on spools or coils

Construction:

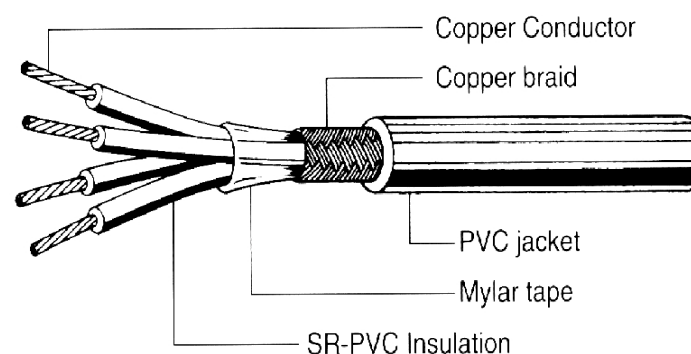

UL Style & CSA Type	AWG No./mm	No. of Cores	Insulation Thickness mm	Jacket Thickness mm	Nominal O.D. mm	Nominal Cap.	
						A pF/m	B PF/m
UL 2343 CSA AWM	24 (7/0.203mm)	5	0.25	1.60	6.80	85	154
		7	0.25	1.60	7.10	85	154
		12	0.25	1.60	8.40	85	154
		15	0.25	1.60	9.00	85	154
		19	0.25	1.60	9.50	85	154
		27	0.25	1.60	11.00	85	154
		37	0.25	1.60	11.80	85	154
		48	0.25	1.60	13.10	85	154
		60	0.25	1.60	13.50	85	154
UL 2343 CSA AWM	22 (7/0.254mm)	5	0.25	1.60	7.30	92	164
		7	0.25	1.60	7.50	92	164
		12	0.25	1.60	9.00	92	164
		15	0.25	1.60	9.30	92	164
		19	0.25	1.60	10.30	92	164
		27	0.25	1.60	11.60	92	164
		37	0.25	1.60	12.70	92	164
		48	0.25	1.60	14.30	92	164
		60	0.25	1.60	15.40	92	164
UL 2343 CSA AWM	20 (19/0.203mm)	5	0.25	1.60	7.90	98	177
		7	0.25	1.60	8.40	98	177
		12	0.25	1.60	10.30	98	177
		15	0.25	1.60	11.00	98	177
		19	0.25	1.60	11.40	98	177
		27	0.25	1.60	13.40	98	177
		37	0.25	1.60	14.70	98	177
		48	0.25	1.60	16.40	98	177
		60	0.25	1.60	17.70	98	177